
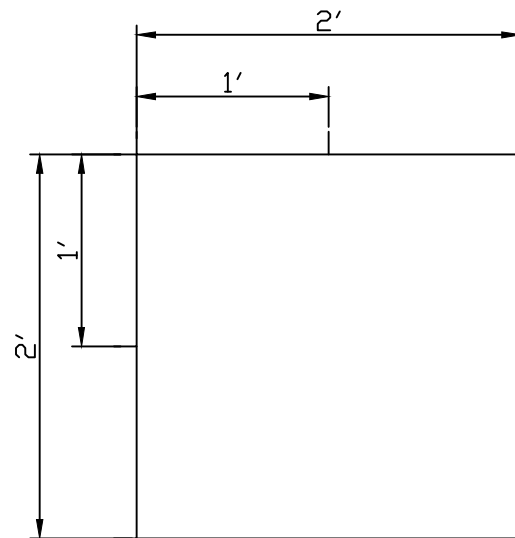


Hello!

Thank you for visiting my store, I am very pleased. I believe that you will be able to sew this bag. If you have any questions or need help, I will be happy to help you.

Here I will try to help you a little with sewing, I will show you which parts and how they should be connected before cutting them out of leather.

Also before cutting out the part, check the size chart.

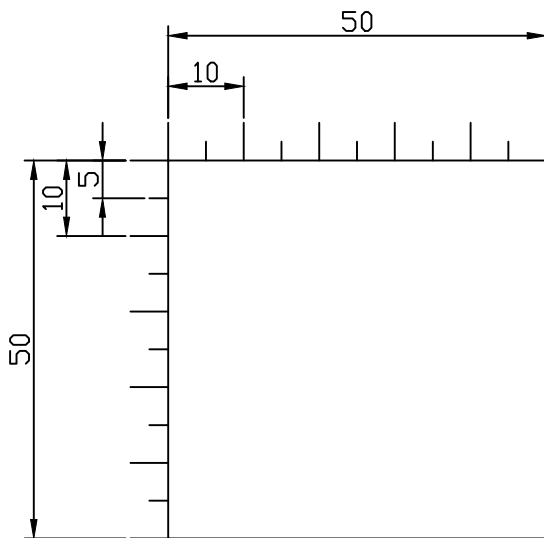

If you have any problems or don't understand something, please write to me, I will be happy to help you.


And the first thing we need to do is connect our parts on sheets of paper.

I marked the connection points with letters on some parts. When connected, you should get a whole letter!

A small step-by-step instruction on sewing this bag.

- our first step is to check whether the pattern has been printed correctly. Below on the sheets you will find squares in cm and inches with a size grid by which you need to check. If the sizes on these sheets match, then we can safely print and transfer the pattern to leather
- we need to make all the details on the pattern ready for transferring them to leather, namely, the bottom of the bag and the handle of the bag must be connected into one whole. The bottom consists of two parts, the front layer of leather on the handle consists of three parts, the second layer of leather for the handle consists of two parts, so to speak the bottom.
- after you have transferred the pattern to the leather, punched all the holes and cut out all the details, you can start sewing the bag.
- this is a very simple bag and as for me everything is clear here
- first of all we sew an internal pocket without a zipper to one side wall of the bag
- we glue and sew a zipper to the internal pocket with a zipper, after that we sew it to the second side part of the bag
- our next step is to sew half rings to the bottom of the bag. On the pattern, the parts for half rings are 20 mm in size
- and now we can say that the bag is almost sewn, our next step is to sew our side parts to the bottom of the bag. My advice is that first we sew the side part of the bag with an internal pocket with a zipper, then the side part of the bag with a regular pocket. It will be a little easier to sew.
- after we have already assembled our bag, so to speak, we only have a few steps left.
- glue and sew the zipper to our parts and sew it to the bag.
- and our final step is to sew our handle with carabiners. The handle is also made for 20mm carabiners.

As a result, you get an elegant cool bag with a fairly simple design, but at the same time very functional and convenient to use.

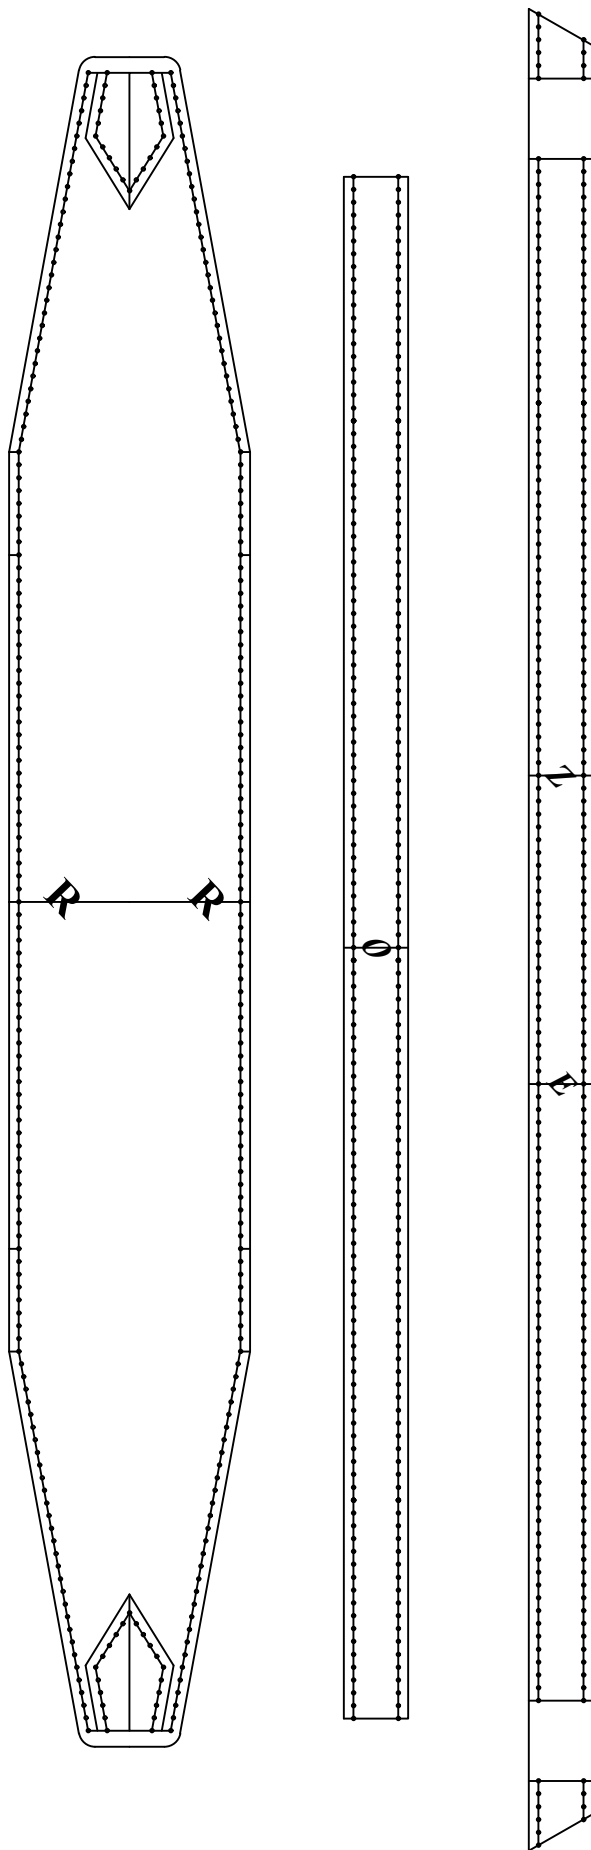

Please note that this sheet shows the parts that need to be connected so that the letters become whole.


These details are provided as an example. They do not need to be cut out on the leather!!!

*WorkShopNiko*



*WorkShopNiko*

WorkShopNiko

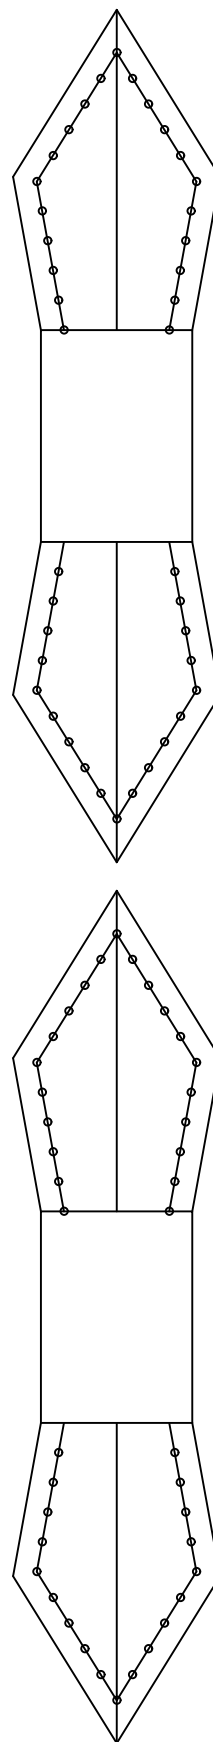

*WorkShopNiko*

