

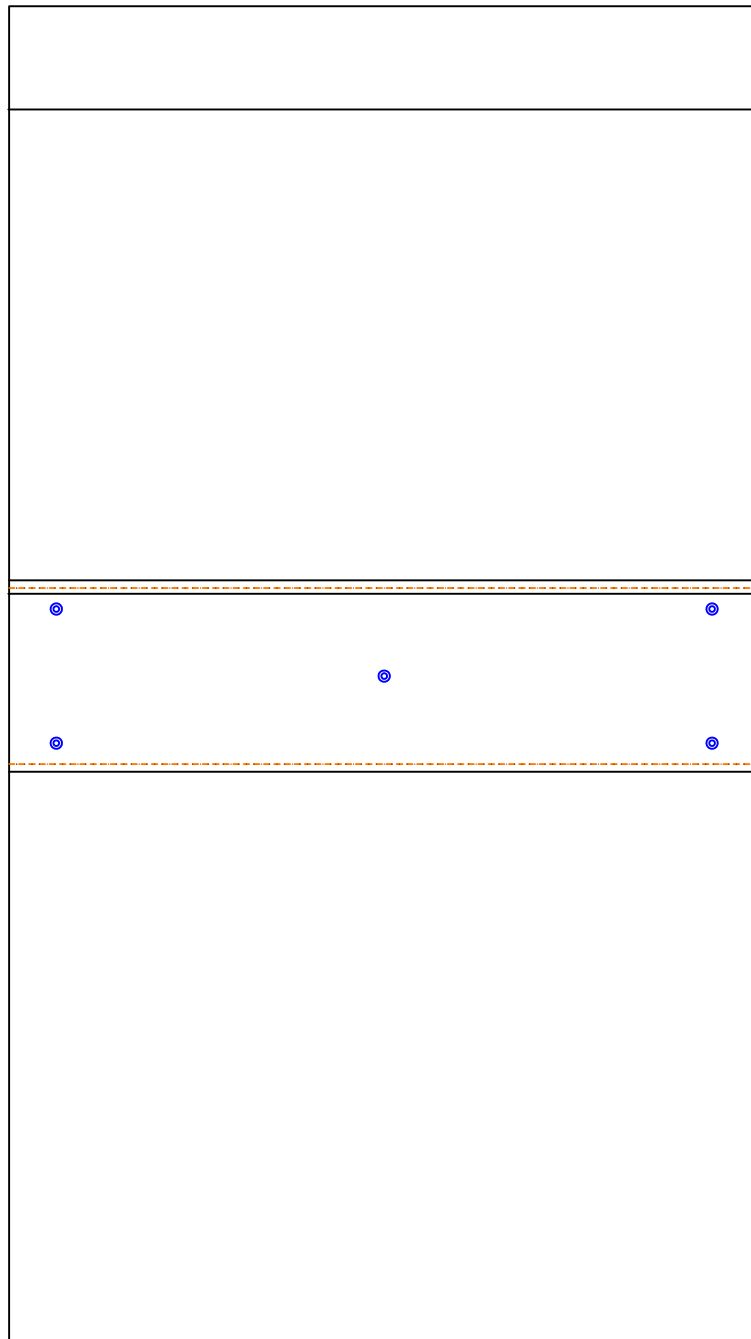


ACC-41 Instruction


Step 1: Sew A17 on the top of A03 and then glue A03 on according orienting line, just glue 2 sides but don't sew, and then glue 1 piece of A04 on the grain side of A01, then install 5 foot nails, after do than, glue the other piece of A04 on the flesh side of A01 to hide the foot nails, and then sew 2 pieces of A04 together. 2 pieces of A04 strength the bag bottom firmly. The A03's bottom was sewn with 2 pieces of A04.

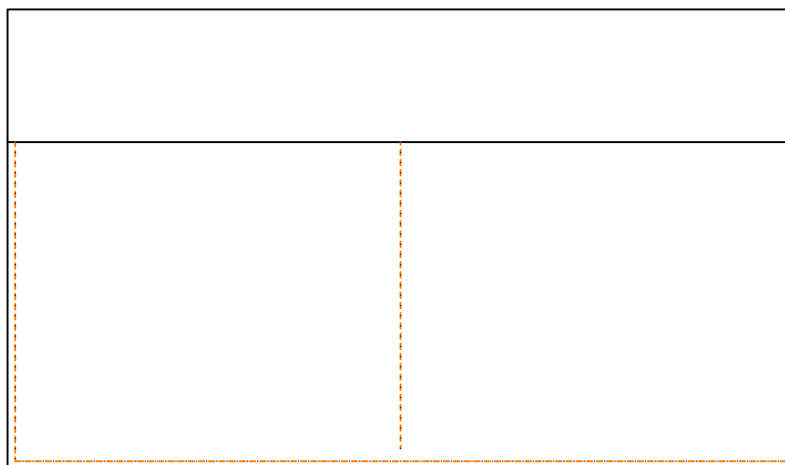


Step 2: Fold top of A14 and sew along the stitching line to get a round top. Then stitch it on A13 to form the inner pocket.

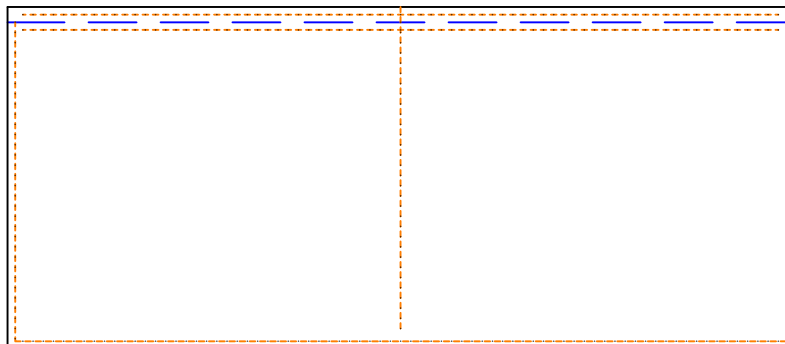


Step 3: Glue A06 with A02 on the top overlap part, then install A08, fold and glue A10 on the flesh side of A02 and then shoot A10, A02 with A09, Don't forget install the D rings on when you do this step.

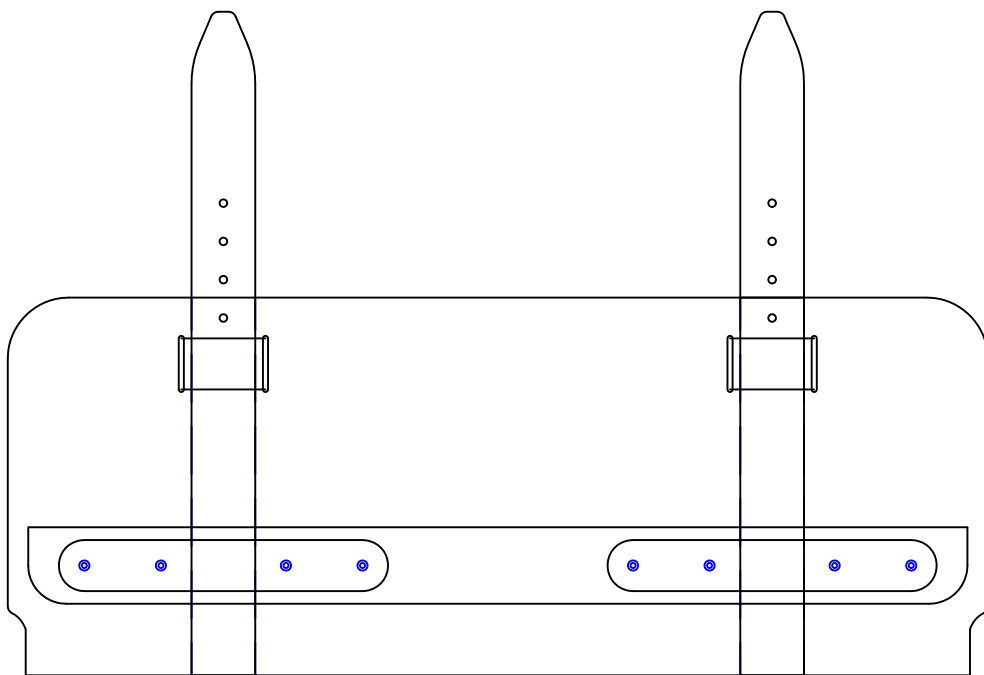

Step 4: Then, combine A02, A13 with A01 according to the orienting lines. By the way, sew A15 on its place.

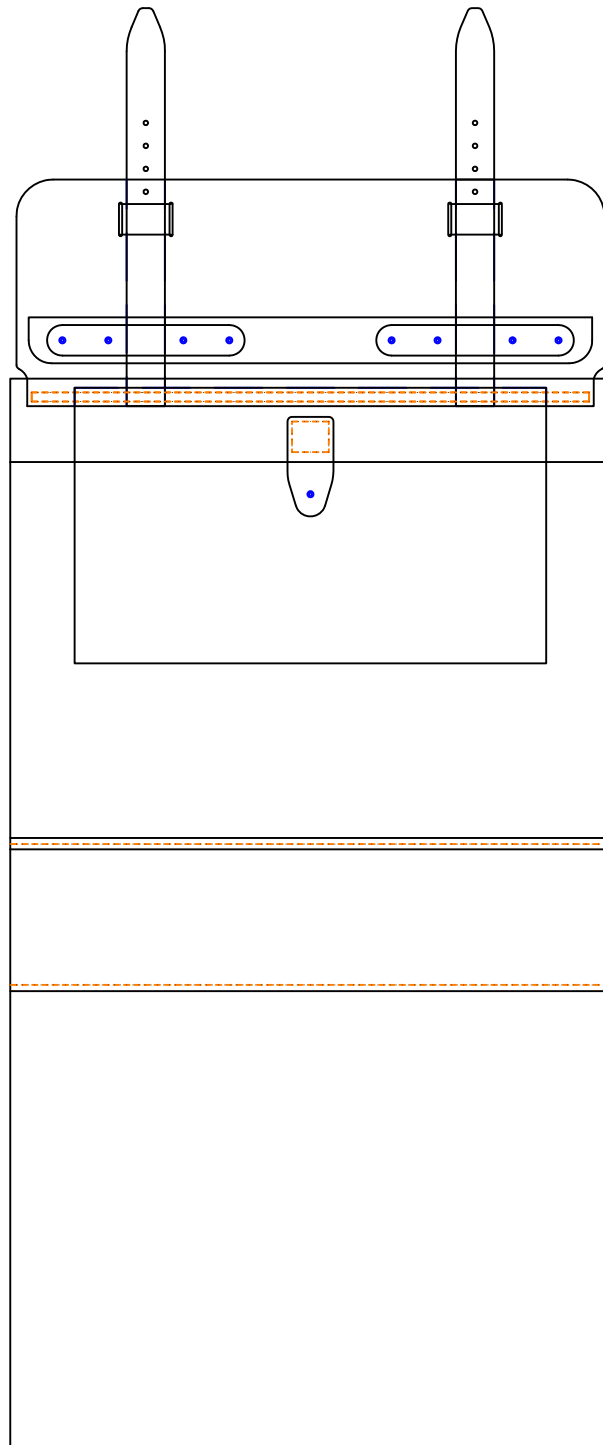

Step 5: Now, we make the handle, the way to make handle is very classic, please learn it carefully. First, fold the handle leather tip to tip by through the D-rings, and then paste the rest part with glue. Second, wrap the wrapper in the middle, and glue firmly. Third, make a stitch in the middle, the handle is OK.

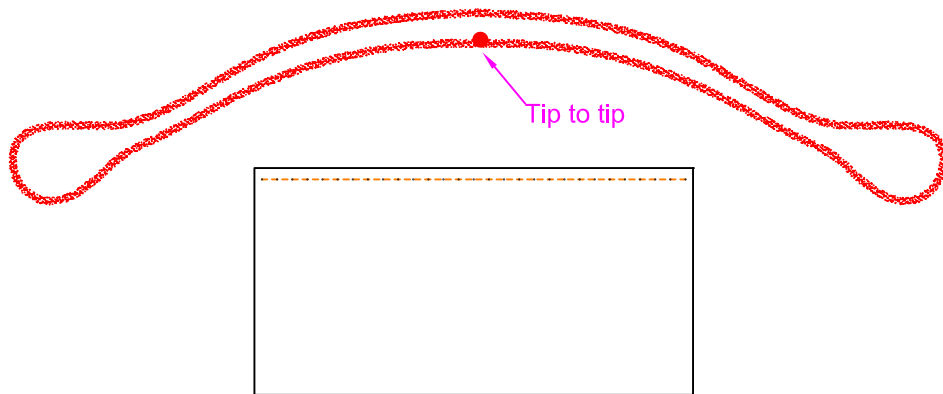

Step 6: Sew 2 pieces of A05 and A16 with A01 by overlap the green circles (anchor points), when you do this, the bag is flesh side out. then turn the bag over (grain side outside). Install A07 with needle buckles, do install the female locks finally, then you will find the perfect places for them.

Notice:

- 1, You can burnish edges for aesthetic;
- 2, Here is the line instruction.

