

# TOOKA PATTERN

NAME	DIFFICULTY	DATE	ON SOCIAL
Waist Bag	● ○ ○	Oct 13 , 2025	#tookapattern

## DIMENSION :

- Front & Back Body ( L16 × W 15 cm ) x2
- Bottom Panel ( L13 × W 7 cm )
- Lock Placement ( L4.5 × W 4 cm )
- Belt Loop ( L4 × W 3 cm ) x2
- Waist Strap ( L28 × W 3.6 cm )
- Flap ( L15 × W 11.5 cm )
- Inner Flap ( L15 × W 4.5 cm )
- Gussets ( L16 × W 7 cm ) x2



- **Faux Leather :**

"If you're using faux leather, you'll need approximately 50 x 20 cm of leather."

- **Natural Leather :**

"If you're using natural leather, you'll need 2.1 square feet of leather."

- **Polyster Leather/ Waxed Thread :**

"You'll need approximately 450 centimeters of thread."

- **Buckle :**

"Use a 2 cm buckle for this project."

- **Plant-based Adhesive :**

"Plant-based glue provides better adhesion and has less odor, making it more suitable for working in small spaces."


- **Edge paint :**

"Apply edge paint to the edges of the bag using a suitable edge painting tool."

- **Turn Lock :**

"Choose the lock in the size and style you prefer"

## PATTERN MEASUREMENT PLAN :

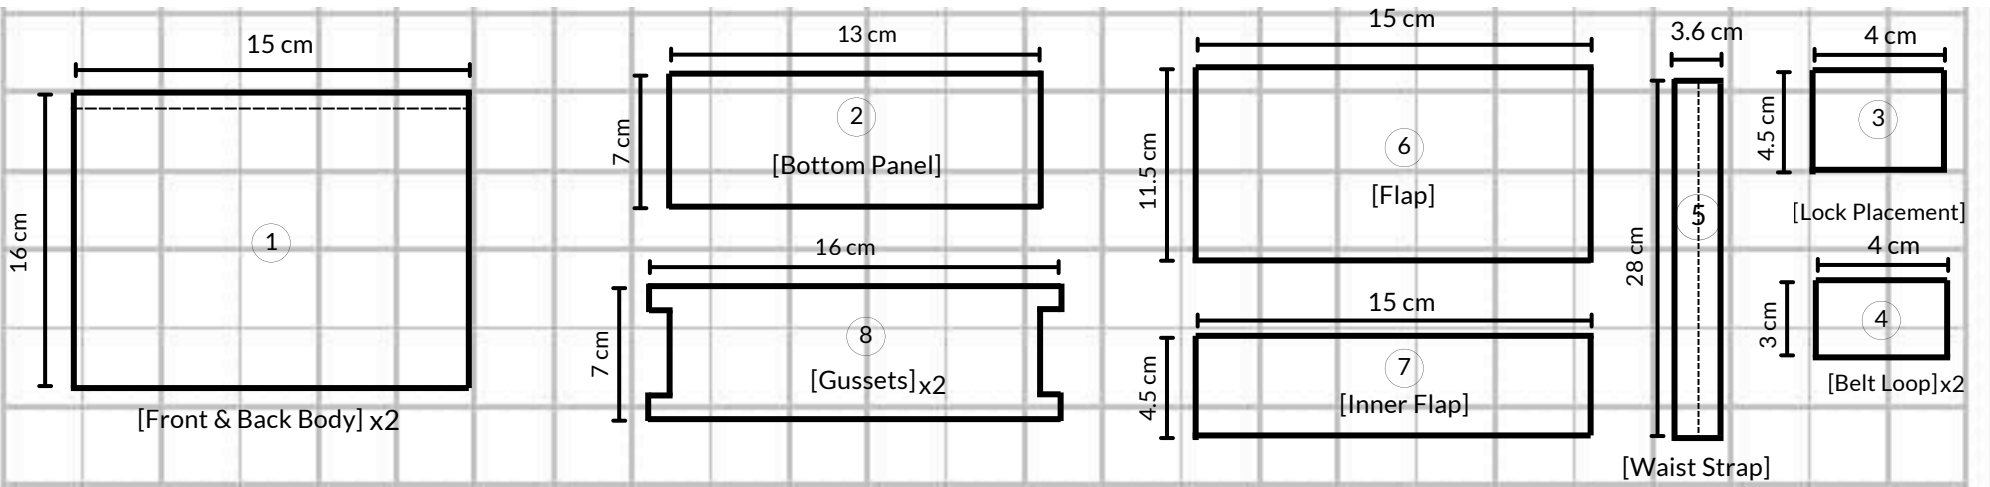

## SEWING VIDEO TUTORIAL :



Copy paste the link to watch the video tutorial  
<https://youtu.be/tYiXxXYuWI?si=QIGoPPMkWWgVtcZ4>

# SEWING TUTORIAL :

---

1-Print the pattern file and cut out the main bag pattern with scissors.

2-Place the patterns on the leather with a small gap between them (grain side up for genuine leather / flesh side up for faux leather).

3-Carefully trace around the patterns with a gel pen or an awl.

4-Cut the leather with a sharp utility knife, using the gaps between the pieces.

5-Skive the cut pieces using a skiving machine or by hand.

6-Trim the skived pieces again with the knife so that the pen marks are removed.

7-Crease and edge-paint the lock placement piece, then glue and stitch it to the front body.

8-Fold the belt loop in half, crease it, then glue and stitch it to the back body.

9-Glue the inner flap lining to the flap, crease the inner and outer edges, burnish, and apply edge paint.

10-Glue the flap to the back body and stitch.

11-Cut the lining according to the pattern.

12-Glue the lining to the front body, back body, bottom panel, and gussets.

13-Fold 1 cm of the top edges of the front, back, and gussets, then stitch.

14-Attach the bottom panel to the gussets and stitch.

15-Glue and stitch the bottom and gussets to the front and back bodies.

16-Burnish and edge-paint the edges.

17-Fold the waist strap, crease it, glue it onto the canvas strap, and stitch.

18-Attach and press the buckle onto the belt.

And you're done! 🎉

---





## \*LINING PATTERN :

---

- For the front and back body: 14 × 14
- For the bottom: 12 × 6
- For the gussets: 14 × 6

PATTERN :


Print the following pattern on A3 paper.

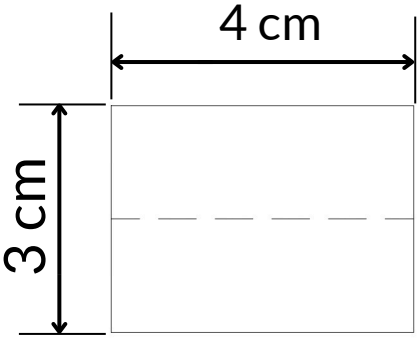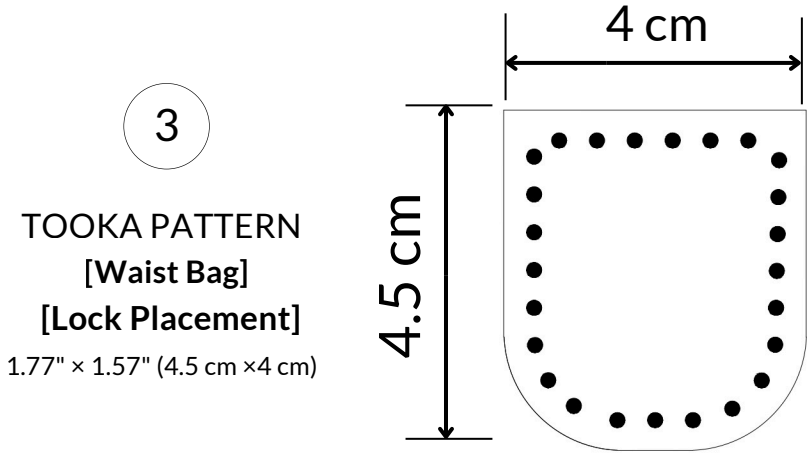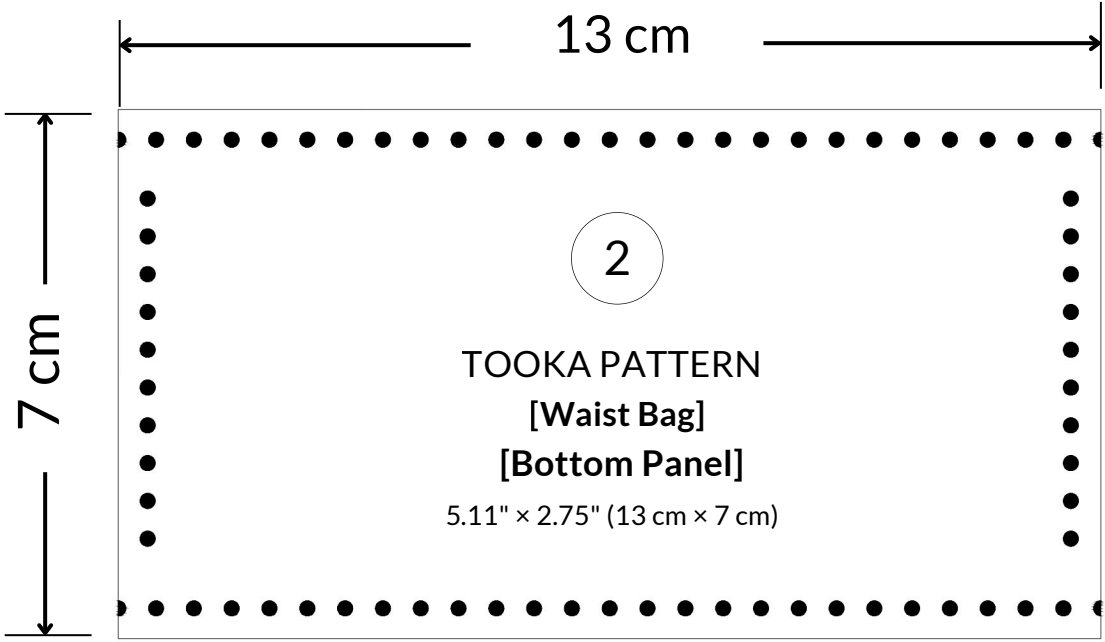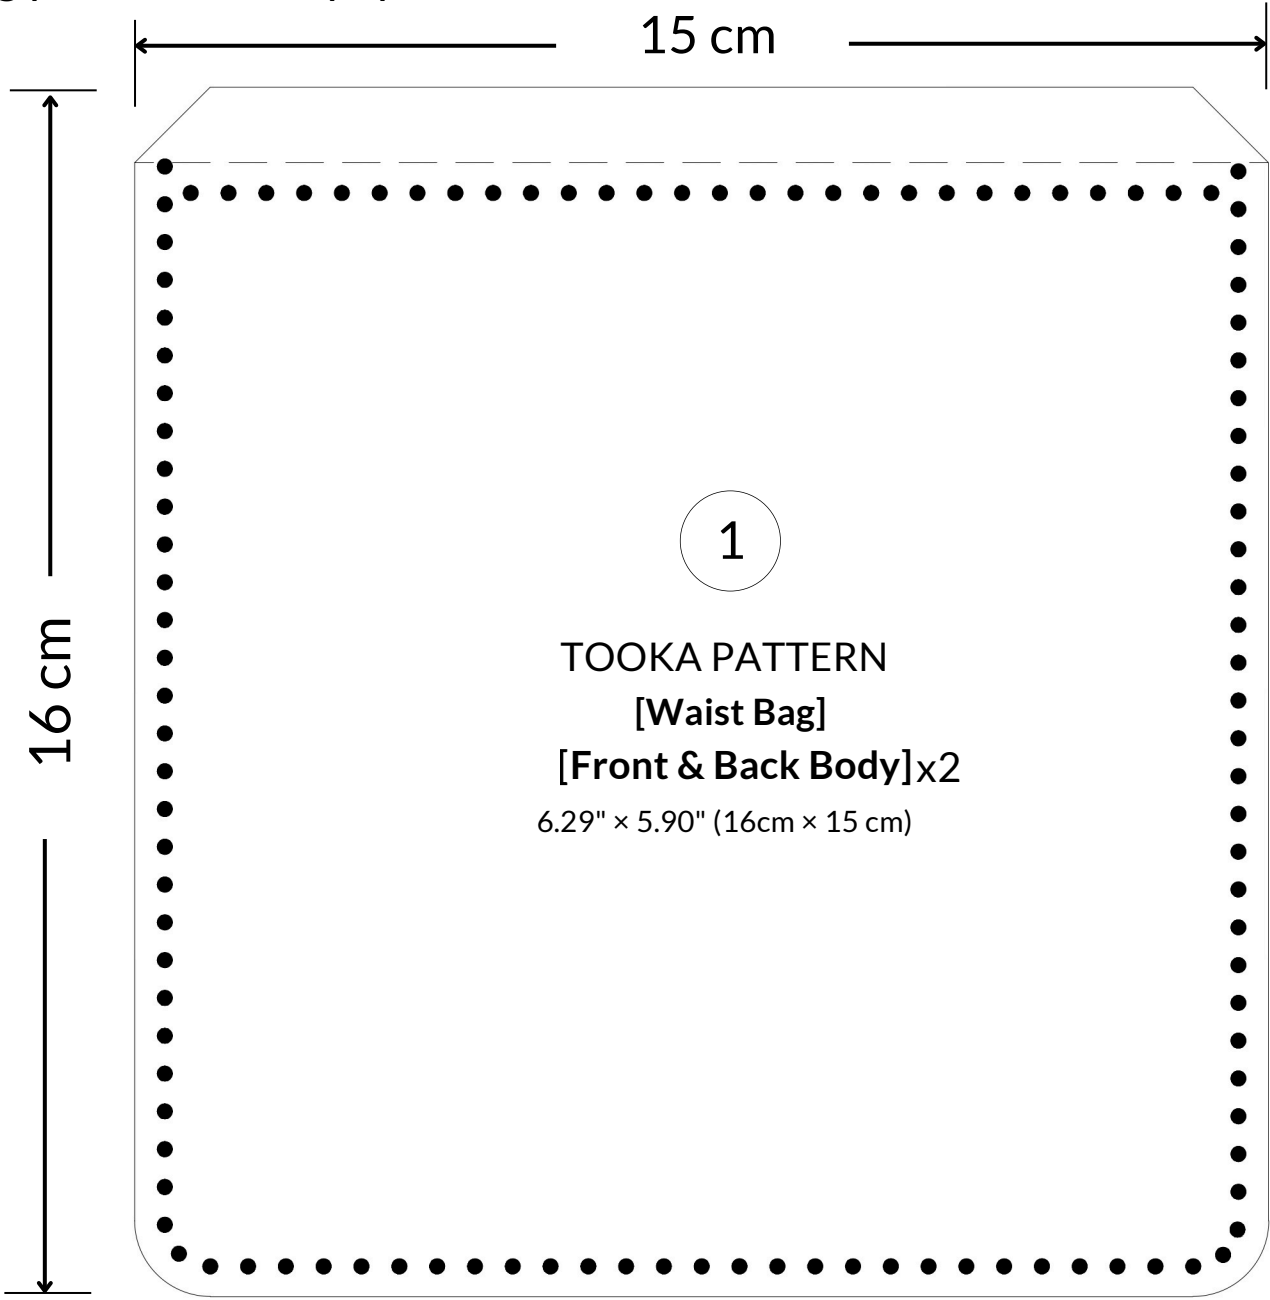

See the **Continuation of the Patterns** on the next page, friends!

PATTERN :

Print the following pattern on A3 paper.

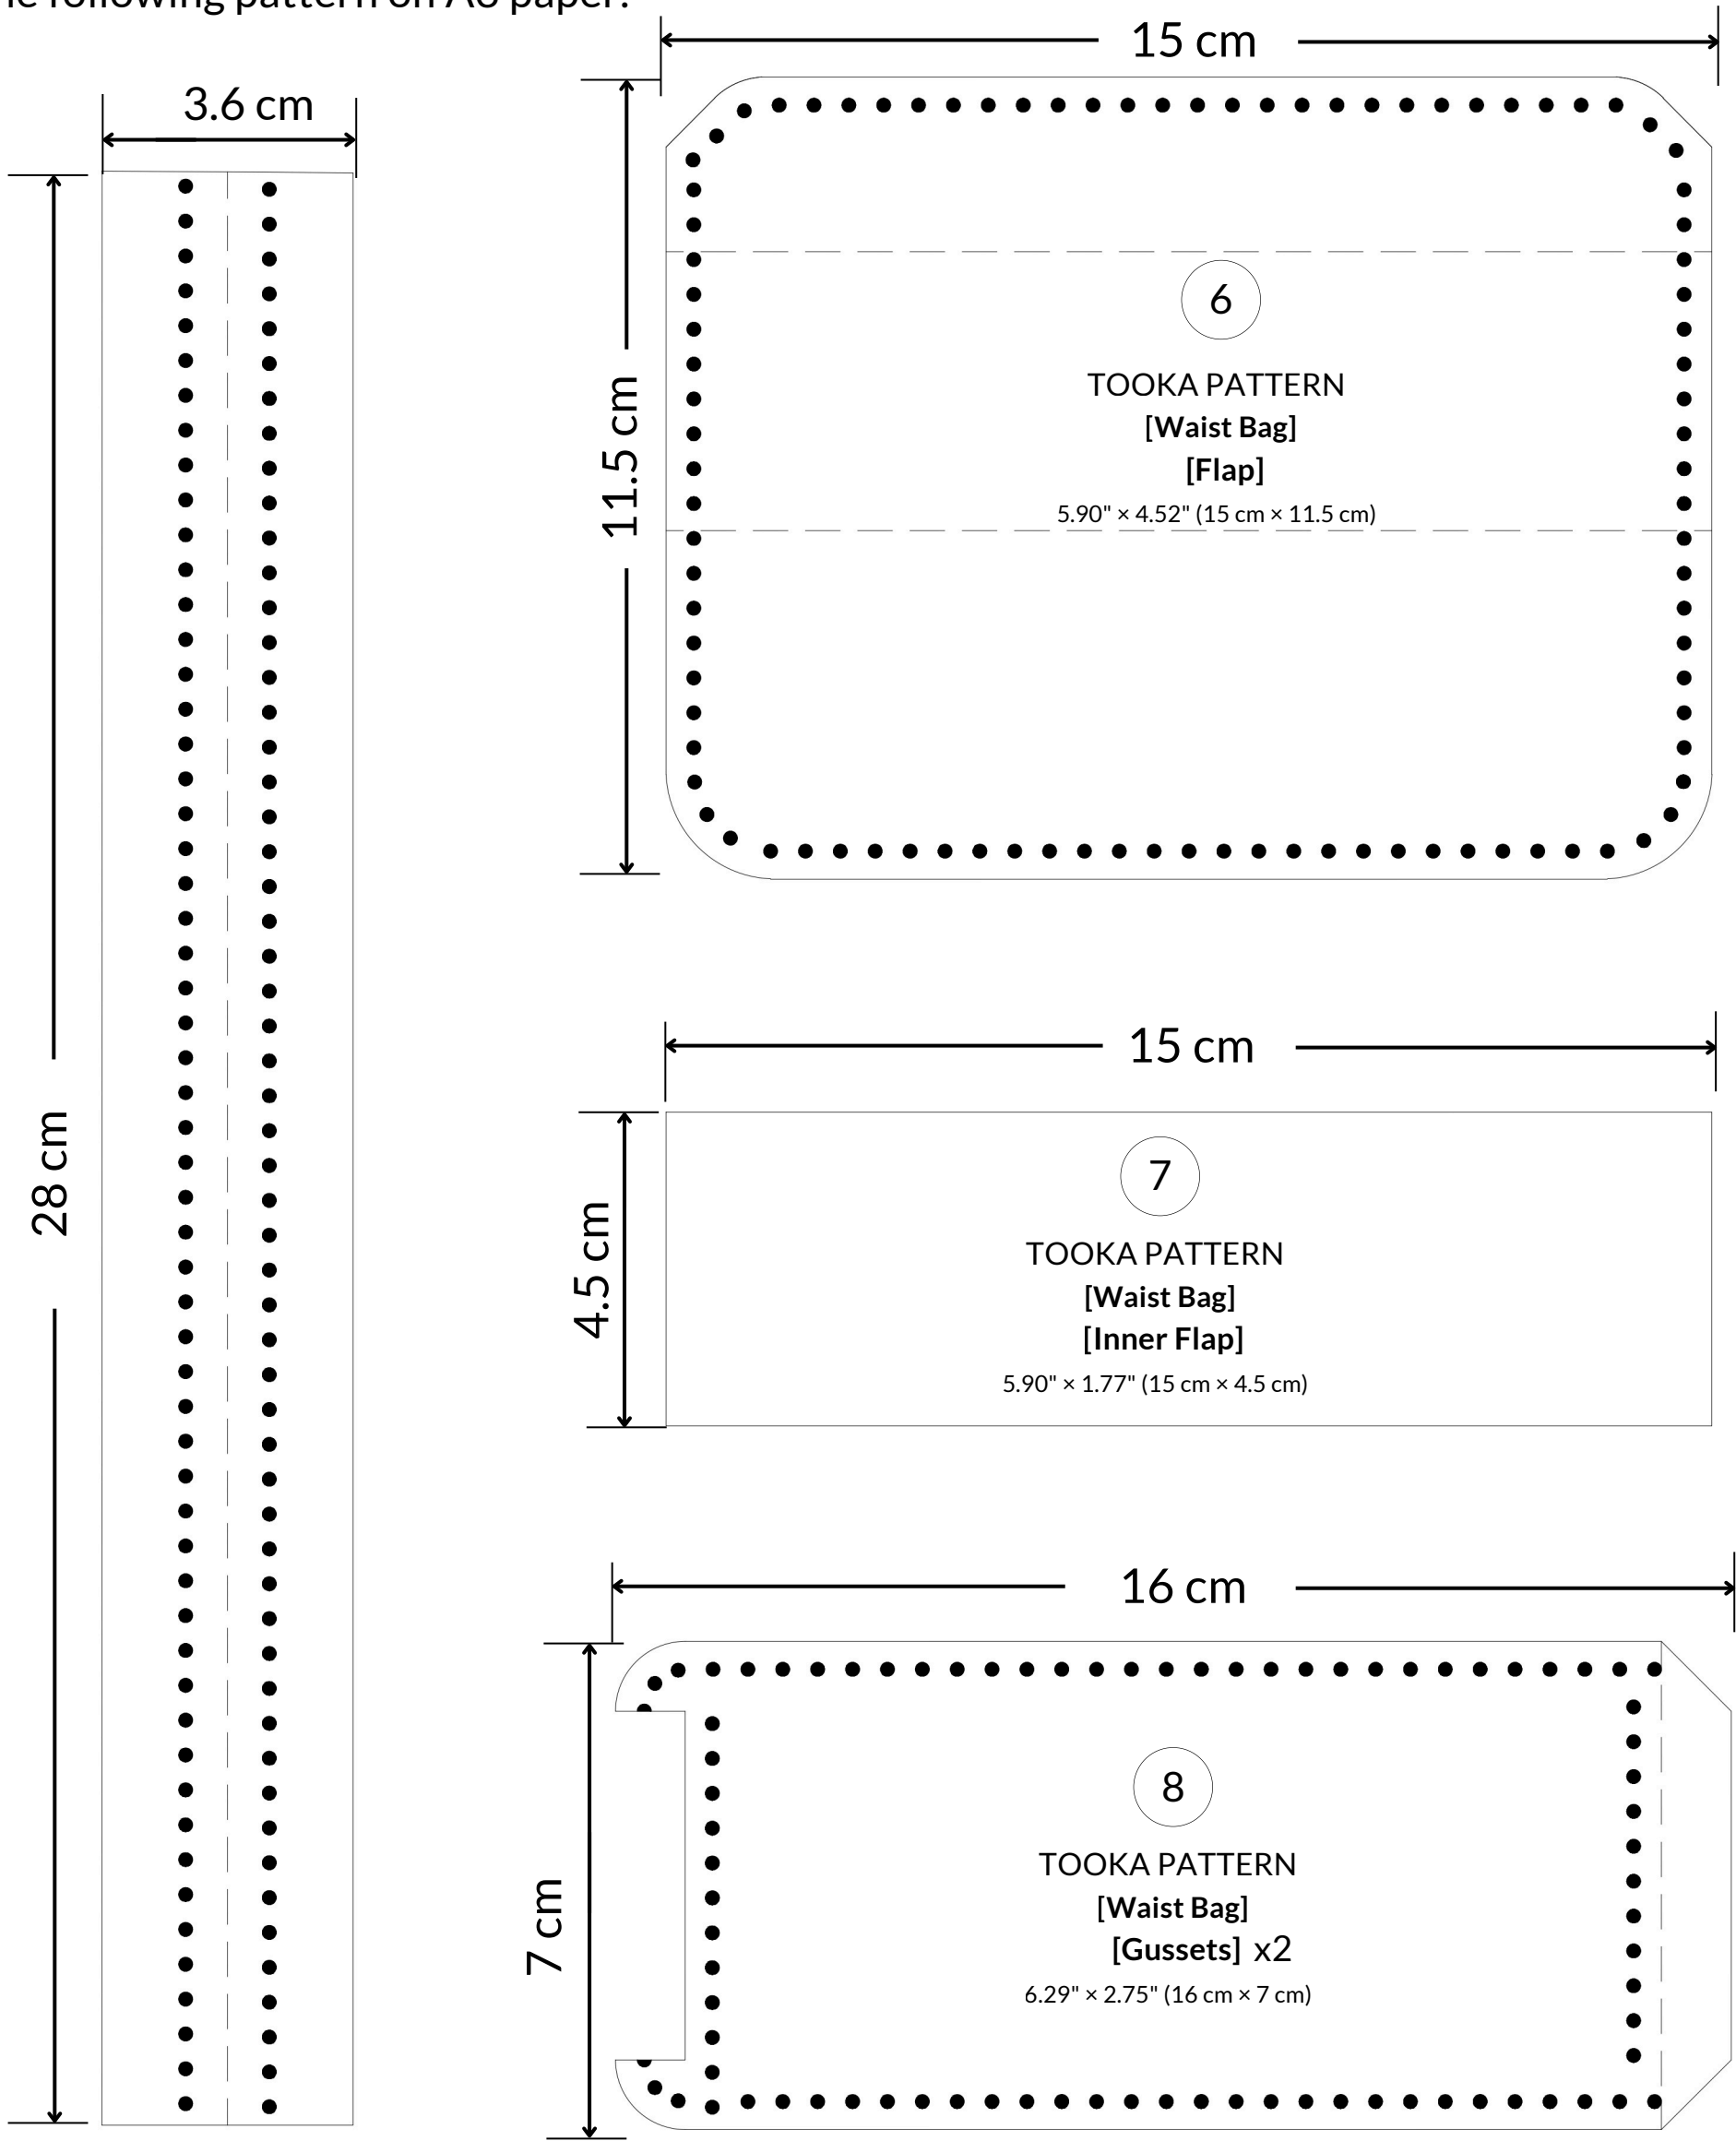

GOOD LUCK !

I hope I was able to help you.

Stay tuned, and I'll teach you how to make the **Passport Wallet** next week!

Follow us on other social media platforms :



@t00kaleather



@tookaleather



@tookaleather