

Leather Bag




**Flores
Patterns**

Dimensions:

Bag Size: 381 x 282 x 72 mm / 15x 11.1 x 2.83 inch

Materials & Tools:

- 01 Adjuster Slide Buckle: inner 36mm/ 1.42inch (Position Strap)
 - 04 Rectangle Buckle Ring: inner 20mm/ 0.78inch (Position G10, G11)
 - 02 Magnetic Snap: 14mm/ 0.55inch (Position G6 and G7)
 - 01 Zipper: 290mm/ 11.41inch (Position Zipper 1)
 - 01 long Zipper : 560mm/ 22.04 inch (Position Zipper 2)
 - 02 D-ring: inner 20mm/ 0.78 inch (Position G12)
 - 02 Swivel hooks: inner 36mm/ 1.42inch (Position Strap)
 - The inner lining fabric has the same size as the pattern
 - Use leather with a thickness of 2 - 2.5mm / 0.079 - 0.098 inch
 - Strap: 1200x 36 mm/ 47.24 x 1.42 inch
-
- Fabric scissors
 - Measuring tape or ruler
 - Fabric marking pen or chalk
 - Sewing machine (suitable for the fabric and leather used)
 - Leather sewing needles
 - Thread

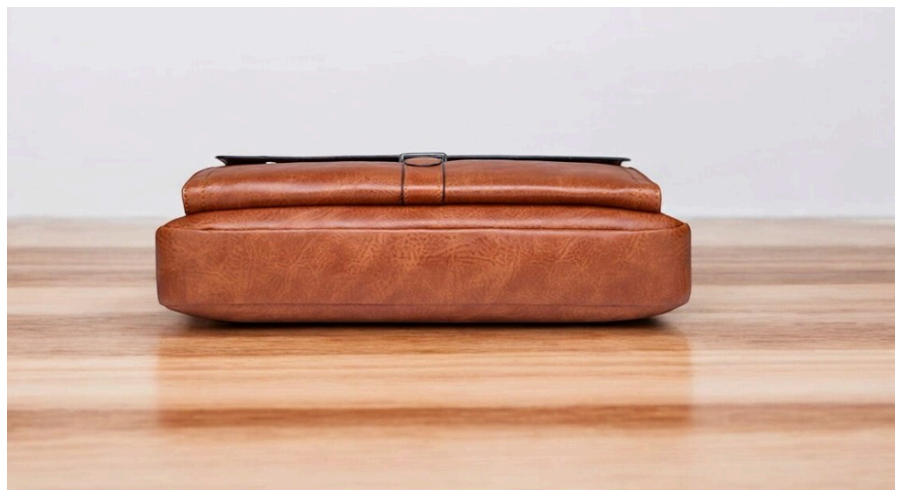

20mm

1 inch

Notes:

- Print the pattern in A1 or A4 size at 100% scale
- If using A4 size, combine the pieces into a pattern like A1 size
- Sew 2 pieces G9 to G7
- Attach the Magnetic Snap to pieces G6 and G7
- Sew 2 pieces of G8 to G5
- Sew 2 pieces G11 and G6 to G5 at the same time (attach Rectangle Buckle Ring to G11)
- Sew G7 to G5 and G8
- Sew 2 pieces of G12 to G4
- Sew G10 to G2
- Sew G1 to G2
- Sew the bottom of the bag and the edge of the bag (G4, G3) as shown in the picture with the positions marked in the pattern
- Sew the Zipper 1 , Zipper 2



1. Print and Prepare the Pattern

Print the pattern to scale on A1 or A4 paper at 100%.

If using A4 sheets, you'll need to combine them into a full-size A1 pattern by aligning the edges accurately.

2. Preparation of Parts for Sewing

Cut Pieces: Cut out all fabric pieces and lining as per the pattern, marking important points like G1, G2, etc., for easier assembly.

Attach the Magnetic Snap to pieces G6 and G7 as marked.

Prepare the zippers for Zipper 1 (290 mm) and Zipper 2 (560 mm).

3. Assembly of Pieces G5, G6, G7, G8

Sew G9 to G7: Place G9 on top of G7 and sew along the marked edge, securing the magnetic snap in position.

Attach G8 to G5: Sew the edges of G8 and G5 together as shown. Make sure that the alignment of both pieces is exact to avoid any shifting when sewing the magnetic snaps.

4. Attaching Buckle Rings and G11, G6 to G5

Position G11 & G6: Align G11 and G6 to the matching edge of G5 and pin them in place. Insert the Rectangle Buckle Ring in between G11 and G5, ensuring it is securely held in the seam.

Sew the pieces together with precision, paying attention to any overlapping lines marked on the pattern.

5. Sewing G7 to G5 and G8

Once the buckle rings and G pieces are aligned, start sewing G7 to G5, making sure to align the edges.

Attach G8 to G5, ensuring proper stitching over the seams for additional strength.

6. Attaching G12, G10, and G4

G12 to G4: Sew G12 to G4, aligning the edges carefully. Ensure the D-ring is placed securely inside the seam before sewing over it.

G10 to G2: Attach G10 to G2, aligning the edges and sewing over the marked area to ensure smooth edges.

7. Main Body Construction and Zippers

G1 to G2: Align the main front piece G1 with G2 (back piece) and pin them together. Sew around the edges, ensuring the alignment is perfect to avoid any mismatching seams.

Sew Zipper 1 and Zipper 2 to their respective positions as marked in the pattern. Ensure smooth functionality of the zippers by testing them before proceeding to the next steps.

8. Final Construction - Sewing the Bag Bottom

Bottom of the Bag: Sew the bottom (G4) to the edges of the bag (G3, G4) as shown in the pictures, following the positions marked in the pattern. This will ensure the base is stable and firmly attached. Secure all corners and check for any inconsistencies in stitching.

9. Attaching the Strap and Final Touches

Sew the strap to the designated positions marked on the sides of the bag.

Use the swivel hooks to attach the adjustable strap to the rings.

